

EXIDE
TUBULAR >>>

EXIDE
INDUSTRIAL


EL PLUS

PREMIUM TUBULAR



Winner of EFY Awards for
Best SMF Battery... 10 times in a row
2005 - 2014

The Ultimate UPS Battery

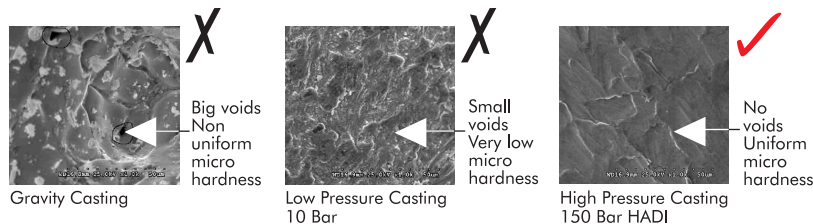

The new EL+ range are manufactured as per Exide's proprietary Torr Tubular technology using one of the world's most exclusive, advanced and state-of-the-art 'HADI' high pressure spine casting (at 100 bar) machines, which is not commonly available. With our hi-tech R&D center at Kolkata, Exide has developed the high-corrosion resistant and robust spine technology using the HADI process, which ensures a super fine grain structure, for strength, long life and highest reliability. It is also cadmium free.

Applications

- UPS System ● Telecommunication Systems ● Office Automation Equipment ● Fire Alarm & Security Systems ● Electronic PABX Systems
- Cable Television Equipment ● Electronic Attendance & Cash Registers ● Process Instrumentation & Control ● Railway Signalling
- Power Plants & Substations ● Cellular Phones (Base Stations & Transmitters) ● Geophysical Equipment ● PCO Monitors (Electronic)

EXIDE EL+ RANGE OF TUBULAR MONOBLOC BATTERIES

SPECIFICATION CHART													
Type	Capacity in Ah at 27°C when discharged for			Charge Current for Initial Charging (Amps)		Approx. + Battery Weight	Approx. + acid qty at 1.220 Sp. Gr.	Overall Dimensions (in mm)			Constant Potential Limiting Current (Amps)	Trickle Charge Current (mA)	
	10 Hr. 1.75 V/Cell	10 Hr. 1.80 V/Cell (Conforms to BIS 13369)	Nominal Monobloc Unit Voltage (V)	Starting 2.35 V/Cell	Finishing 2.75 V/Cell	Filled with acid (Kg) +/-3%	Litres/Cell	Length +/-3 mm	Width +/-3 mm	Height +/-3 mm		Minimum	Maximum
6EL40+	40	38	12	5.00	2.50	27.69	9.50	410	176	281	10.00	40	160
6EL50+	50	47	12	6.00	3.00	30.46	10.00	410	176	281	12.50	50	200
6EL66+	66	63	12	8.00	4.00	40.70	13.36	506	220	293	16.50	70	280
6EL80+	80	76	12	9.60	5.00	44.00	12.62	506	220	293	20.00	80	320

EXIDE EL+ TALL TUBULAR RANGE

SPECIFICATION CHART													
Type	Capacity in Ah at 27°C when discharged for			Charge Current for Initial Charging (Amps)		Approx. + Battery Weight	Approx. + acid qty at 1.220 Sp. Gr.	Overall Dimensions (in mm)			Constant Potential Limiting Current (Amps)	Trickle Charge Current (mA)	
	10 Hr. 1.75 V/Cell	10 Hr. 1.80 V/Cell (Conforms to BIS 13369)	Nominal Monobloc Unit Voltage (V)	Starting 2.35 V/Cell	Finishing 2.75 V/Cell	Filled with acid (Kg) +/-5%	Litres/Cell	Length +/-3 mm	Width +/-3 mm	Height +/-3 mm		Minimum	Maximum
6EL100+	100	95	12	12.00	6.00	56.90	22.21	500	187	416	25.00	100	400
6EL130+	130	123	12	16.00	8.00	66.90	21.56	500	187	416	32.50	130	520
6EL150+	150	142	12	18.00	9.00	71.70	19.75	500	187	416	37.50	150	600
6EL180+	180	171	12	22.00	11.00	70.80	18.03	500	187	416	45.00	180	720

- a. For constant potential charging higher rates are permissible for maximum charger setting of 2.40 volts per cell.
- b. Trickle charge voltage should be adjusted to 2.25 volts per cell.
- c. Technical information regarding 6V EL+ Tubular available on request.

Initial Charging Instructions

- Fill up to the required level with battery grade dilute sulphuric acid
- Filling specific gravity: 1.220 ± 0.005 at 27°C
- Rest period: 12 hours
- Charge at 12% of C(10) capacity to 2.35 vpc and then at 6% of C(10) capacity to 2.75vpc
- Minimum Ah input: 450% of C10 capacity
- All parameters for 12 Volt Nominal Monobloc Units

Statutory Notice:

All batteries contain lead, which is harmful for humans and environment. As per statutory requirements, the used battery must be returned to the authorized dealer, manufacturer or at the designated collection centres.

The benefits derived are as follows:

1. The designed float life of Exide EL+ extends well beyond 5 years and on an average 8 – 10 years for EL+ Range.
2. The cyclic life of EL+ is also very high to the tune of 1200 cycles at 80% depth of discharge.
3. The low antimony content of the spines ensures a very low self discharge loss of the order of 1% of the 10 hour rate capacity per week at 25°C.
4. The combination of low antimony alloy and ceramic vent plug keeps the water addition requirement very low. A topping up frequency of once in 6-9 months can easily be achieved in normal operating conditions.

Contact our Exide Powercentre Showrooms for Sales & Services

Head Office

Kolkata 'Exide House', 59E Chowringhee Road, Kolkata - 700 020, Phone (033) 2283 2120/33/36/50/51/71/ 2238/39, Fax (033) 2283 2632/37

Corporate Marketing Office

Kolkata 6A Hatibagan Road, Entally, Kolkata - 700 014, Phone (033) 2286 6158/6159, Fax (033) 2286 6186, E-mail: indlcare@exide.co.in

Regional Offices

New Delhi 'Exide House', 8/42 Kirtinagar Industrial Area, Opposite MDH Spice Factory, New Delhi - 110015, Phone: (011) 4144 0293/0068/ 0927/4238

Chennai 1581/4237 6282/4243 3023/ 3453/ 4235 2085 Exide Industries Limited, New No. 824/2, Old No. 398, Third Floor, Anna Salai, Nandanam, Chennai - 600 035 (Before Hyundai Showroom), Phone (044) 4907 5100, (044) 4907 5125, Fax (044) 4907 5126

Mumbai 'RAHEJAS', 5th Floor, 8C Main Avenue, V P Road, Santacruz (West), Mumbai - 400 054, Phone (022) 2646 5283/84, Fax (022) 2646 5042

EXIDE EL PLUS
Kolkata 6A Hatibagan Road, Entally, Kolkata - 700 014, Phone (033) 2284 3137/3168/3169, Fax (033) 2289 7455

Branch Offices

Cuttack Ph.: (0671) 234 8833
Guwahati Ph.: (0361) 719 7273
Jamshedpur Ph.: (0657) 229 0784/0785 Fax (0657) 229 0894 (PP)
Patna Ph.: (0612) 322 3865, Fax (0612) 252 9902 (PP)
Siliguri Ph.: (0353) 253 8321, Fax (0353) 252 3731
Chandigarh Ph.: (0172) 500 0014
Dehradun Ph.: (0135) 264 4144/324 7766
Ghaziabad Ph.: (0120) 437 7031
Jaipur Ph.: (0141) 519 1213/214/206, Fax (0141) 519 1221
HUBLI Ph.: (0836) 233 3404
Mangalore Ph.: (0824) 428 6331

EL PLUS is a product of ISO 9001, ISO 14001, and OHSAS 18001 certified factory

Jalandhar Ph.: (0181) 500 9305/9315/9321/9322, Fax (0181) 500 9326
Lucknow Ph.: (0522) 401 895/896/404 1896/1899
Varanasi Ph.: (0542) 220 2129
Bengaluru Ph.: (080) 4081 0807/0809, Fax (080) 2574 4226
Coimbatore Ph.: (0422) 470 0105, Fax (0422) 222 0858
Hyderabad Ph.: (040) 6516 3958
Kochi Ph.: (0484) 414 9351, 414 9352, Fax (0484) 414 9311
Ahmedabad Ph.: (079) 6510 8207, Fax (079) 2963 0532
Indore Ph.: (0731) 654 2293
Mumbai (Fort) Ph.: (022) 2207 2188/89, Fax (022) 2207 8631
Nagpur Ph.: (0712) 253 9972/9973, Fax (0712) 253 8348
Pune Ph.: (020) 6522 2706, Fax (020) 2443 0094
Vadodara Telefax: (0265) 239 4240

This catalogue is issued to provide outline information only and is not deemed to form part of an offer or contract. Our policy is one of continued improvement and we reserve the right to change details without prior notice.

PHX/EL PLUS /12-2015

*Applied for
+ Estimated

E-mail: indlcare@exide.co.in, Visit us at www.exide4u.com

Toll Free No. 1800-103-5454